

ASSEMBLY MANUAL IP44 SEALANT TO SWITCHES OF DECO, ICON, MINI AND FLEXI SERIES

Characteristics of the sealant


The sealant (IP44) is intended for installation by the customer himself in switches of DECO, ICON, MINI and FLEXI series type:

Seria	Symbol produktu
DECO	DWP-1, DWP-2, DWP-3, DWP-3.1, DWP-4, DWP-4.1, DWP-5, DWP-6, DWP-6.1, DWP-8, DWP-8.1, DWP-9, DWP-10.1, DWP-10.11, DWP-10.2, DWP-10.21, DWP-33, DWP-33.1, DWP-44.1, DWP-44.2
ICON	IWP-1, IWP-2, IWP-3, IWP-3.1, IWP-4, IWP-4.1, IWP-5, IWP-6, IWP-6.1, IWP-8, IWP-8.1, IWP-9, IWP-10.1, IWP-10.11, IWP-10.2, IWP-10.21, IWP-33, IWP-33.1, IWP-44.1, IWP-44.2
MINI	MWP-1, MWP-2, MWP-3, MWP-3.1, MWP-4, MWP-4.1, MWP-5, MWP-6, MWP-6.1, MWP-8, MWP-8.1, MWP-9, MWP-10.1, MWP-10.11, MWP-10.2, MWP-10.21, MWP-33, MWP-33.1, MWP-44.1, MWP-44.2
FLEXI	FWP-1, FWP-2, FWP-3, FWP-3.1, FWP-4, FWP-4.1, FWP-5, FWP-6, FWP-6.1, FWP-8, FWP-8.1, FWP-9, FWP-10.1, FWP-10.11, FWP-10.2, FWP-10.21, FWP-33, FWP-33.1, FWP-44.1, FWP-44.2

Way of connection

The sealer U-1 shall be set between the switch cube and the central sheet of the mechanism. In the correct position there are two external buttons in the slots of the sealer. Next, prior to installation of button/buttons, the external frame shall be installed.

The way of setting is presented on the schema below

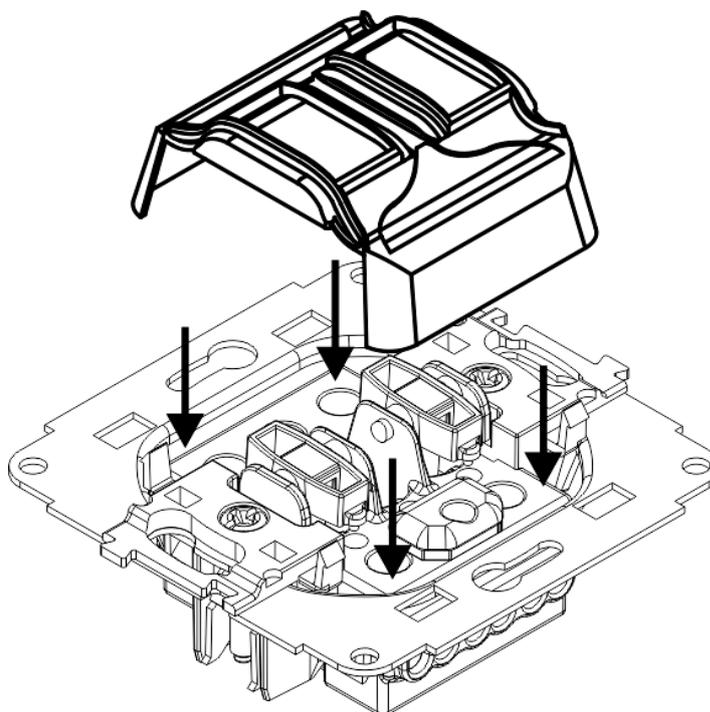

Accessories required for the sealant IP 44

Together with the sealer U-1 a DRPH (for DECO series), MKLH-1 / MKLH-2 (for MINI and ICON series) or FRH (for FLEXI series) a middle/external frame/press (for DECO/ICON/MINI/FLEXI series) shall be purchased for switch IP 44 available in different colour variants (to be also used in multiframe).

Note!

Assembly shall be held by a suitably qualified person with deactivated voltage and shall meet the national safety standards.